


DLG-LED-043



Application:

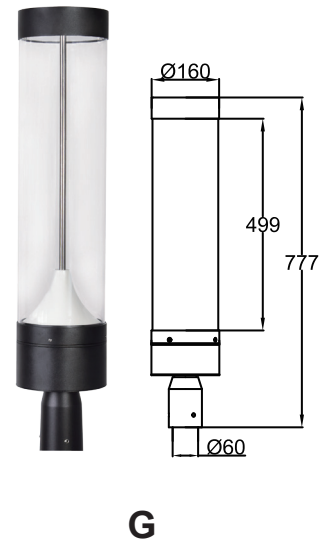

Walkways



Parks and Gardens



Car parks



Prestigious




Retail



Amenity

Distribution:

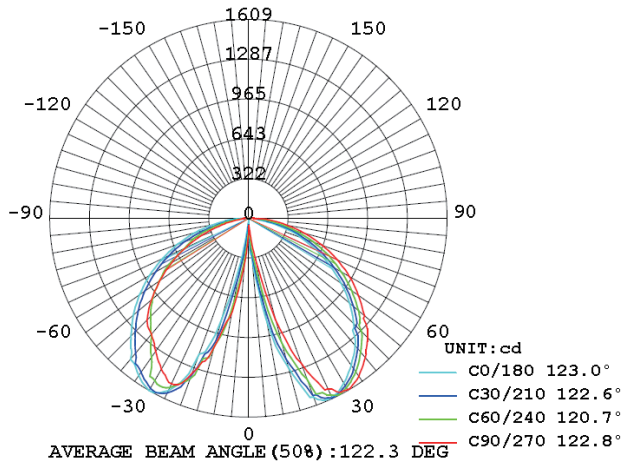

Features:

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy.
- The diffuser is a clear anti-UV PMMA for high efficiency and vandal resistance.
- Lumileds 3030 led chip and Sosen driver as regular, Meanwell, Philips driver options.
- Easy access to LED and driver via a removable head.
- 2700-6500K color temperature options.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying, regular color: Black, Silver, RAL7043, RAL7016
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.
- Warranty is 3-5 years.

Specification:

Item No.	LED	Lumens	Wattage	CCT	CRI
DLG-LED-043-25W	Lumileds 3030	2700LM	25W	2700-6500K	Ra≥80
DLG-LED-043-30W	Lumileds 3030	3145LM	30W	2700-6500K	Ra≥80
DLG-LED-043-40W	Lumileds 3030	4017LM	40W	2700-6500K	Ra≥80
DLG-LED-043-50W	Lumileds 3030	4883LM	50W	2700-6500K	Ra≥80